

Assembly Instructions for Folding Van Ramp



Before installing the ramp, to ensure that the doors will close correctly, place the ramp in the back of the van where you are planning to fix it. If the top of your van doors curve inwards slightly and the ramp causes them not to close, you can adjust the angle of the ramp using the regulating screws.

BEFORE INSTALLTION:

- Ensure that there is no damage to the ramp, it should easily fold in and out
- ALWAYS read the instructions carefully before installing and using the ramp and keep them for future reference
- A sticker on the side of the ramp will indicate the maximum load capacity that the ramp can withstand, please ensure that these are correct for your requirements before installation

Installing the ramp with standard method:


1. Once you are satisfied with the position of the ramp, mark the holes in the fixing plate on the vehicle floor, ensuring that there are no obstructions underneath;

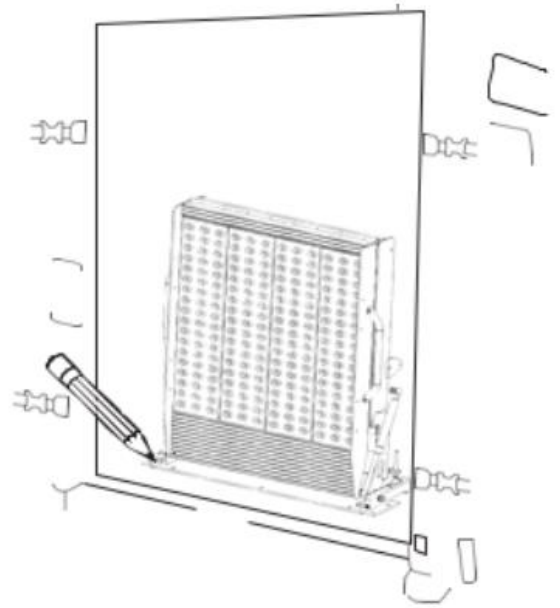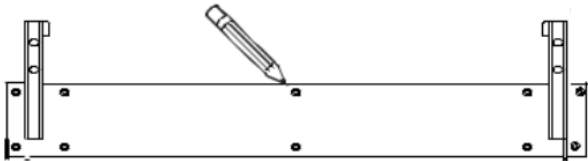

2. Remove the ramp from the van and drill holes in the marked areas with a 10.5mm diameter drill bit;




3. Once the holes have been made, place the ramp back in the van, line up the holes in the fixing plate with the holes drilled. Using the fixings supplied, screw the ramp in to place:

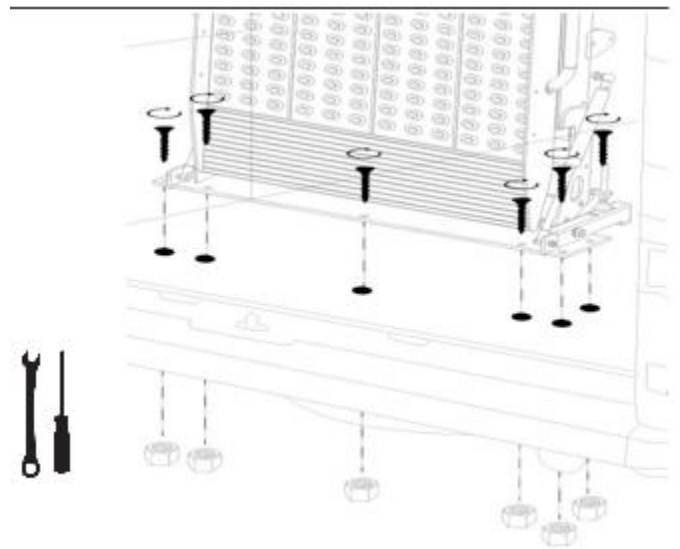


Installing the ramp with quick release system (Optional - sold separately):

4. Repeat steps 1-3 (see above) but only on the with the L shaped plates provided:

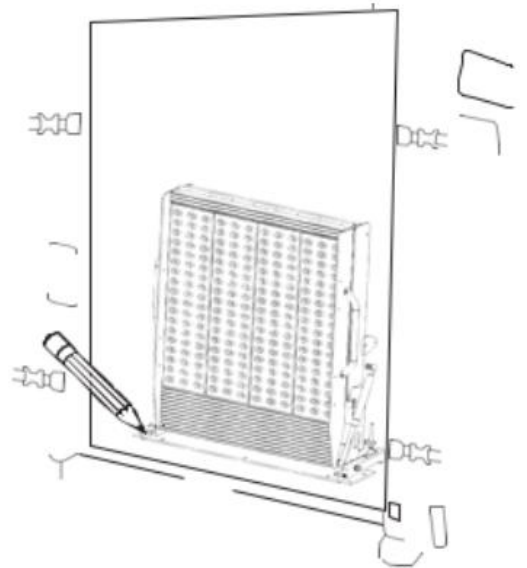

5. After levelling out the ramp by adjusting the side support brackets, ramp will be ready for use.

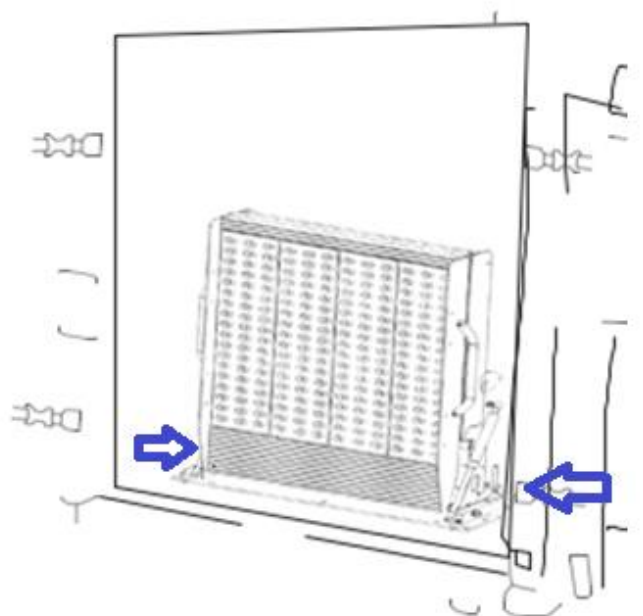

USAGE GUIDELINES:

- Ensure that the vehicle is on flat terrain with the handbrake applied.
- Catch the handle with both hands to open the ramp.
- Pay attention whilst handling the ramp.
- After use, refold the ramp and ensure the safety hook is closed.
- Use the safety belts provided to secure ramp while vehicle is in transit, failure to use these will void the warranty
- The bolts must be kept tight and regularly checked. Should the bolts come loose this will damage the ramp and void the warranty.
- The Ramp People are not responsible for any accidents or damage due to the ramp being installed or used incorrectly.

